



# LINE SSM N/Z

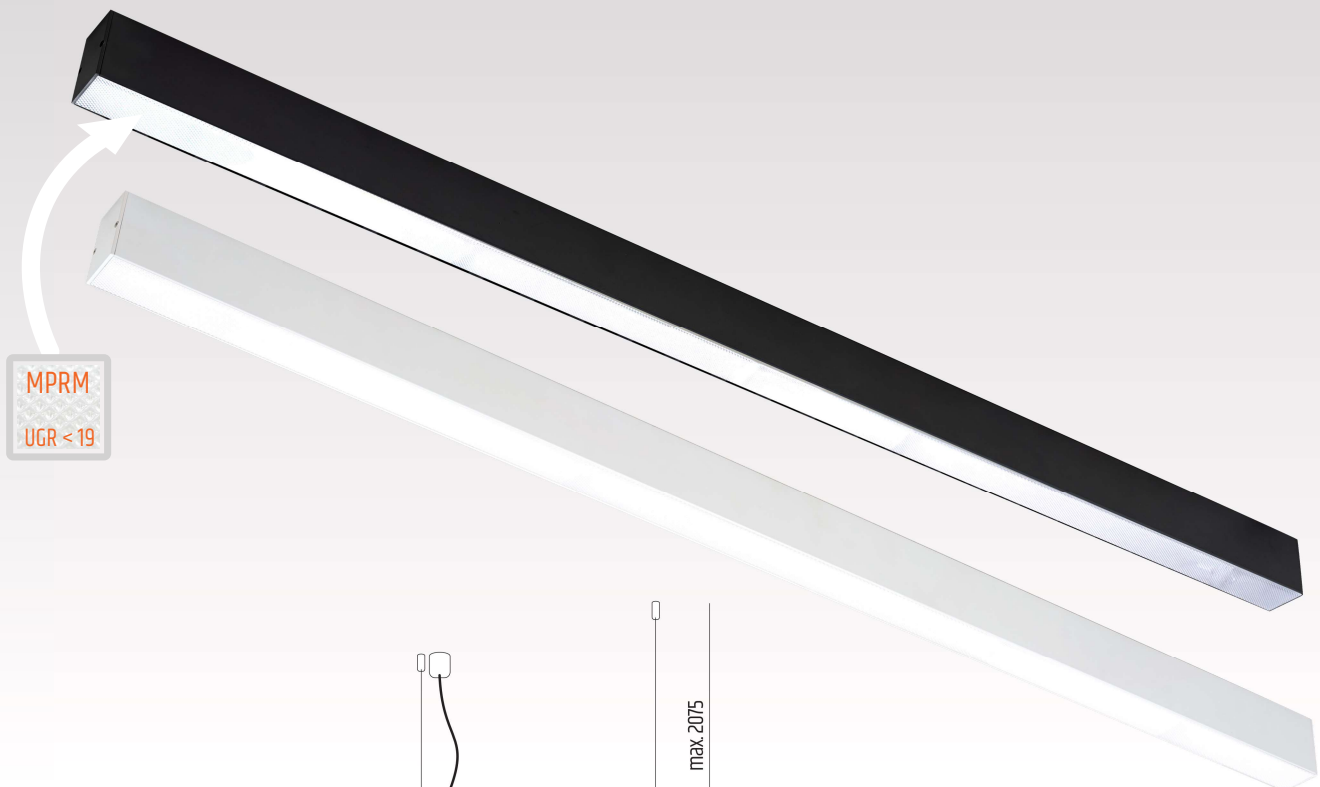

**MPRM**  
UGR < 19

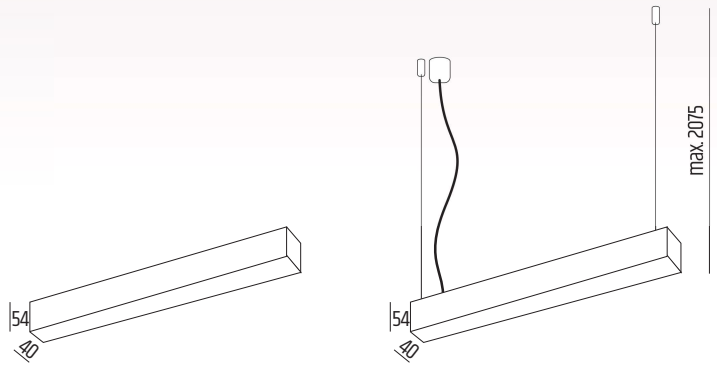

FINISH COLORS:



## LINE SSM N/Z

450lm-2,8W / 650lm-4,2W / 780lm-5,2W / 940lm-6,2W / 1100lm-7,2W - 0,28mb  
3000K lub 4000K

## LINE SSM N/Z 3000K

dimensions (mm)	number of LED modules	value $\phi$ (lm) per Led module	
		450/650/780/940/1100 (lm)	power of system (W)
a		code	
570	2	SSLM_Z9041	5,5 / 8,0 / 9,5 / 11,4 / 13,3
853		SSLM_Z9043	8,3 / 12,0 / 14,3 / 17,2 / 20,1
1136	4	SSLM_Z9045	11,0 / 16,0 / 19,0 / 22,8 / 26,7
1419	5	SSLM_Z9047	13,8 / 20,0 / 23,8 / 28,6 / 33,4
1702	6	SSLM_Z9049	16,5 / 24,0 / 28,5 / 34,2 / 40,0
198		SSLM_Z9051	19,3 / 28,0 / 33,3 / 39,9 / 46,7
226		SSLM_Z9053	22,1 / 32,0 / 38,1 / 45,6 / 53,4


## LINE SSM N/Z 4000K

dimensions (mm)	number of LED modules	value $\phi$ (lm) per Led module	
		450/650/780/940/1100 (lm)	power of system (W)
a		code	
570	2	SSLM_Z9042	5,5 / 8,0 / 9,5 / 11,4 / 13,3
853	3	SSLM_Z9044	8,3 / 12,0 / 14,3 / 17,2 / 20,1
1136	4	SSLM_Z9046	11,0 / 16,0 / 19,0 / 22,8 / 26,7
1419	5	SSLM_Z9048	13,8 / 20,0 / 23,8 / 28,6 / 33,4
1702	6	SSLM_Z9050	16,5 / 24,0 / 28,5 / 34,2 / 40,0
1985	7	SSLM_Z9052	19,3 / 28,0 / 33,3 / 39,9 / 46,7
2268	8	SSLM_Z9054	22,1 / 32,0 / 38,1 / 45,6 / 53,4

HOUSING:



MONTAGE:



DIFFUSER:



OPTICS/ROTATION:



LIGHT SOURCE:



POWER SUPPLY:



CONTROL:



NORMS:

